


A measured step forward

Time for change

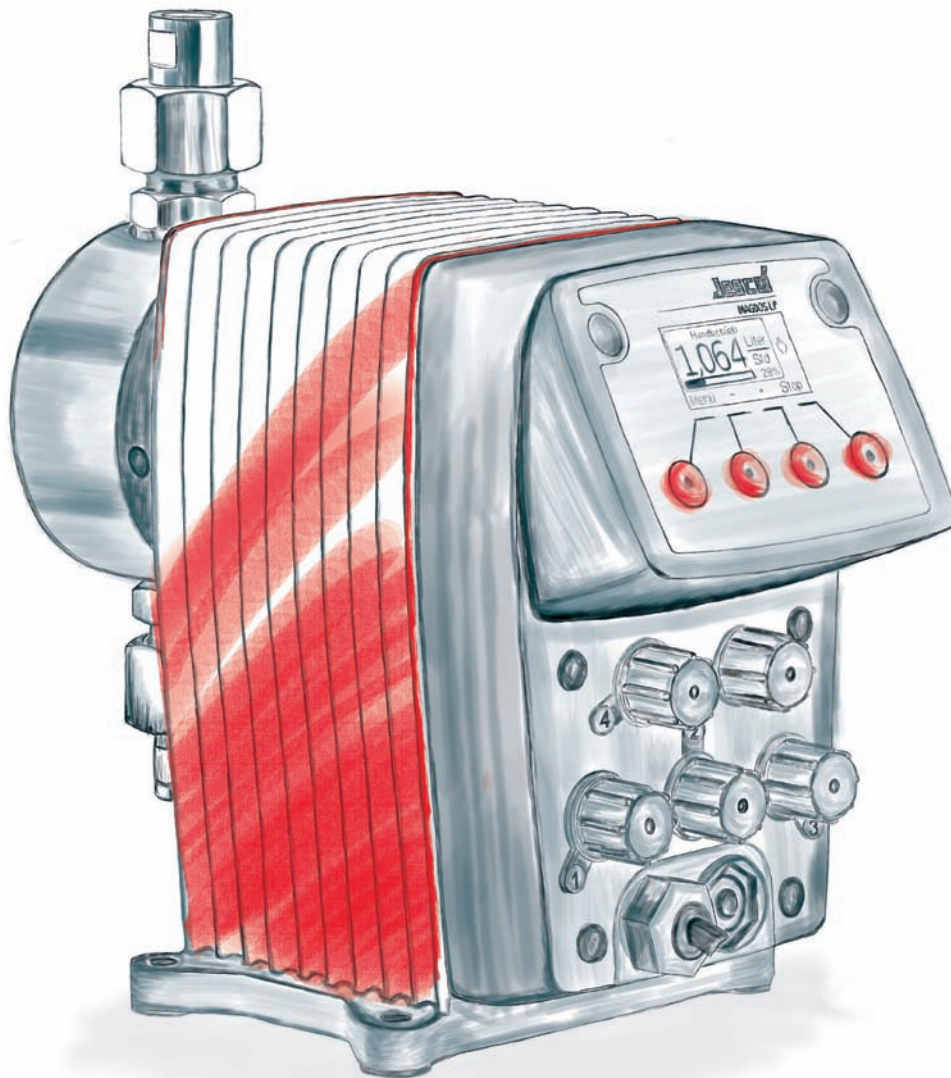

MEMDOS SMART
Stepper motor-driven diaphragm dosing pumps
Made in Germany

Dosing | Liquids
Conveying | Gases
Control | Systems



The Smart series



MEMDOS SMART - the trend steppers

Intelligent

- Smart Drive - microprocessor controlled drive
- Smart Stop - predefined diaphragm start position
- Diaphragm replacement programme
- Multi-language graphic display with a high contrast
- Externally controllable
- Operation via multifunction keys
- Innovative calibration function
- Integrated webservice
- Event log
- Safety function through password protection
- Integrated dosing head ventilation

Economical

- Precise stepper motor drive
- Low-pulsation dosing
- Maintenance-free drive
- Process reliability
- Standard thread connections
- Material consistency with the accessories
- Bus connection via the Industrial Ethernet



Flexible

- Slow Motion mode - delivery of highly viscous media
- Wide-range power supply unit - can be used worldwide
- Delivery units selectable
- A wide variety of applications
- Rotating dosing head
- Compact design
- Wall and floor mounting possible
- Suitable for tank and water meter installation
- Connection set supplied
- Protection class IP65

Expandable

- Suction lines
- Injection nozzles
- Pentabloc
- And many more accessories

The subtle difference

Operation - Visualisation - Programming

A user interface for all new dosing pumps



- 100% user-friendly
- Intuitive operation via multifunction keys
- Clear menu structure
- Multi-language graphic display with a high contrast

Well thought-out down to the smallest detail

Material consistency from the suction line to the injection nozzle



- Available in all standard materials
- Makes operation easier
- Increases operating safety

Modbus - Networked with progress

The future of industrial communication - the Industrial Ethernet



- Industrial Ethernet via MODBUS-TCP
- Expensive special equipment is no longer needed
- Easy identification of devices through adjustable IP address
- Remote control and diagnosis of the pump is available via the controller (TOPAX DX), PLC and microcontroller
- Enables optimum system automation

The Smart series



Capacity range 5 – 19.2 l/h, up to 15 bar

MEMDOS SMART LB

Compact and precise - these are key features of the stepper motor-driven diaphragm dosing pump MEMDOS SMART LB with its innovative drive concept. Equipped with protection class IP65, it is ideal for use in adverse conditions.

Functions

- Output range from 5 – 19.2 l/h, up to 15 bar
- Power supply unit 110 – 240 V, 50/60 Hz, IP65, 25 W
- Microprocessor controlled drive
- Integrated dosing head venting facility (only MEMDOS SMART LB 5 and LB 10 with dosing head made of plastic)
- Suitable for wall and floor mounting
- Material finishes PVC, PP, PVDF and stainless steel
- Infinitely variable stroke frequency from 0 – 100 %
- Release input for external start/stop

MEMDOS SMART LD

The MEMDOS SMART LD's drive is fully adjustable. The stepper motor with its wear-free tooth belt drive, ensures a particularly homogeneous and gentle dosing process.

Functions

- Output range from 5 – 19.2 l/h, up to 15 bar
- Power supply unit 110 – 240 V, 50/60 Hz, IP65, 25 W
- Microprocessor controlled drive
- Integrated dosing head venting facility (only MEMDOS SMART LD 5 and LD 10 with dosing head made of plastic)
- Suitable for wall and floor mounting
- Material finishes PVC, PP, PVDF and stainless steel
- Stroke frequency can be precisely adjusted via the keyboard
- Graphic display
- Pulse input (increase and reduction)
- Level input with early warning and main alarm
- Release input for external start/stop
- Calculation wizard for pulse operation available online

Stepper motor-driven diaphragm dosing pumps



Capacity range 5 – 19.2 l/h, up to 15 bar

MEMDOS SMART LK

The MEMDOS SMART LK's drive is fully adjustable. The stepper motor with its wear-free tooth belt drive, ensures a particularly homogeneous and gentle dosing process.

Functions

- Output range from 5 – 19.2 l/h, up to 15 bar
- Power supply unit 110 – 240 V, 50/60 Hz, IP65, 25 W
- Microprocessor controlled drive
- Integrated dosing head venting facility (only MEMDOS SMART LK 5 and LK 10 with dosing head made of plastic)
- Suitable for wall and floor mounting
- Material finishes PVC, PP, PVDF and stainless steel
- Stroke frequency can be precisely adjusted via the keyboard
- Graphic display with multi-language menu
- Pulse input (increase and reduction)
- Level input with early warning and main alarm
- Release input for external start/stop
- Supply amount displayed in various units
- Maximum delivery rate can be limited
- Diaphragm replacement programme
- One Slow Motion setup possible
- Stroke feedback output
- Alarm relay output


MEMDOS SMART LP

The stepper motor-driven diaphragm dosing pump MEMDOS SMART LP provides a wide variety of attractive solutions for demanding dosing tasks. With its innovative drive, the dosing pump can carry out suction and discharge strokes at different speeds and is unbeatable in terms of its flexibility.

Functions

- Output range from 5 – 19.2 l/h, up to 15 bar
- Power supply unit 110 – 240 V, 50/60 Hz, IP65, 25 W
- Microprocessor controlled drive
- Integrated dosing head venting facility (only MEMDOS SMART LP 5 and LP 10 with dosing head made of plastic)
- Suitable for wall and floor mounting
- Material finishes PVC, PP, PVDF and stainless steel
- Stroke frequency can be precisely adjusted via the keyboard
- Graphic display with multi-language menu
- Analogue input and pulse input (increase and reduction)
- Level input with early warning and main alarm
- Release input for external start/stop
- Supply amount displayed in various units
- Maximum delivery rate can be limited
- Diaphragm replacement programme
- 2 Slow Motion modes for dosing viscous media
- Stroke feedback output
- Alarm relay output
- Batch dosing with interval and timer functions
- Dosing control input
- Diaphragm failure input for leak monitoring
- Ethernet interface (optional)

Standard - accessories



Suction lines

Type SL-2 with ceramic reinforcement piece, cable length 3,000 mm, tube length 2,500 mm. Level monitoring and pre-alarm with 2 switching points, switching distance approx. 50 mm. Switching function: Closer on rising level, electrical connection to dosing pump via plug connector M12x1.

Flexible suction line, SA model with foot valve and load part made from ceramic and 2,500 mm hose length.



Injection nozzles


From the connection of the dosing line to the dosing point.
Injection nozzle type R, spring-loaded, opening pressure 0.1 bar



Suction and pressure tube


Permissible operating pressure at 20 °C in accordance with DIN EN ISO 7751, chemical resistance and correct connection are assumed.

Back pressure and pressure relief valves




Back pressure valves to be mounted in the dosing line.
Adjustable pressure 1 – 16 bar.

Pressure relief valves to be mounted in the dosing line.
Adjustable pressure: Plastic 1 – 16 bar, stainless steel 1 – 25 bar.



Wall bracket and connecting piece

Wall bracket including mounting material for mounting pumps. Material: PP
Connecting piece and mounting hardware required to fit the pump to a water meter.
Material: Cast aluminium, coated



Various cables, plugs and adapters

Cable for: external release of pulse output A-coded, 0/4 – 20 mA and pulse input A-coded, cable for alarm B-coded, level monitoring A-coded, Ethernet network connection D-coded.

Plug connector: for retrofitting existing suction lines or level monitors.

Adapter: when using older suction lines with a 3.5 mm jack plug; when using a suction line with M12x1 plug connector.

Lutz-Jesco online tools

Fast results with online tools

Calculate the pressure loss in the dosing head or in the pipeline online. Or take advantage of the versatile unit conversions for the various international sizes for volume, pressure, length, etc.

- MEMDOS SMART LD and MAGDOS LD calculation wizard
- Suction line calculation
- Pressure peak calculation
- Pressure loss calculation

All information and results are based on rough calculations. The results need to be checked. We assume no responsibility.



Lutz-Jesco App

Find out more about the new dosing pumps

Zoom into the smallest detail in the 3D view. Inform yourself about the comprehensive range of accessories and spare parts for dosing pumps.

View the product information for each version of dosing pump. Convince yourself of the easy operation of the dosing pumps with their menu simulation. Here, all parameters required for your applications can be easily set and that in 5 languages.



The Lutz-Jesco App for iPad and iPhone is from the iTunes App Store.



All other information can be found at:
www.lutz-jesco.com

Lutz-Jesco Service

Always one idea ahead

As an ISO 9001 certified company, we leave nothing to chance. We have made it our mission to ensure that our products conform to the highest technological standards.

Regular cleaning and servicing of your devices does not just maintain the value of the system, but also provides protection from unanticipated failures and saves you a great deal of time, trouble and money.

As a manufacturer we offer you first-class service.

- Installation and installation support
- Commissioning and commissioning support
- Service and maintenance
- Troubleshooting





Product range

Lutz Pumpen GmbH
P.O. Box 1462
D-97864 Wertheim
www.lutz-pumpen.de



Product range

Lutz-Jesco GmbH
P.O. Box 100164
D-30891 Wedemark
www.lutz-jesco.com



Barrel and container pumps



Dosing pumps



Measuring and control equipment



Flow meters



Chlorinators



Disinfection



Double diaphragm pumps



Chemical centrifugal pumps



Standard plus



Centrifugal pumps



TECHNOPOL

Products for the disinfection of swimming pool water based on salt water electrolysis and domestic water technology



The Lutz-Jesco App for iPad and iPhone is available from the iTunes App Store. Further information can be found at www.lutz-jesco.com



Head Office
Lutz-Jesco GmbH
Am Bostelberge 19
30900 Wedemark
Germany

Tel.: +49 5130 5802-0
Fax: +49 5130 580268

E-mail: info@lutz-jesco.com
Website: www.lutz-jesco.de

Hungary
Lutz-Jesco Üzletág
Vasvári P. u. 9.
9024 Győr
Hungary

Tel.: +36 96 523046
Fax: +36 96 523047

E-mail: info@lutz-jesco.hu
Website: www.lutz-jesco.hu

Austria
Lutz-Jesco GmbH
Aredstraße 7/2
2544 Leobersdorf
Austria

Tel.: +43 2256 62180
Fax: +43 2256 6218062

E-mail: info@lutz-jesco.at
Website: www.lutz-jesco.at

Netherlands
Lutz-Jesco Nederland B.V.
Nijverheidstraat 14 C
2984 AH Ridderkerk
Netherlands

Tel.: +31 180 499460
Fax: +31 180 497516

E-mail: info@lutz-jesco.nl
Website: www.lutz-jesco.nl



Great Britain
Lutz-Jesco (GB) Ltd.
Gateway Estate
West Midlands Freeport
Birmingham B26 3QD
Great Britain

Tel.: +44 121 782 2662
Fax: +44 121 782 2680

E-mail: info@lutz-jesco.co.uk
Website: www.lutz-jesco.co.uk

USA
Lutz-JESCO America Corp.
55 Bernar Park
Rochester, N.Y. 14624
USA

Tel.: +1 585 426-0990
Fax: +1 585 426-4025

E-mail: mail@jescoamerica.com
Website: www.lutzjescoamerica.com

East Asia
Lutz-Jesco East Asia Sdn Bhd
6 Jalan Saudagar U1/16
Hicom Glenmarie Industrial Park
40150 Shah Alam/ Selangor
Malaysia

Tel.: +603 55692322
Fax: +603 55691322

E-mail: info@lutz-jescoasia.com
Website: www.lutz-jescoasia.com

Middle East
Lutz-Jesco Middle East FZE
P.O. Box 9614
SAIF-Free Zone Center
Sharjah
UAE

Tel.: +971 6 5572205
Fax: +971 6 5572230

E-mail: info@jescome.com
Website: www.jescome.com

